

Dry Ice Blasting Unit

ASCO Nanojet complete (fully adjustable)

part no. 900910 & 4064272



The **ASCO Nanojet** has been specially developed for the plastics industry. It has an integrated pellet grinder in which the dry ice pellets are crushed into finest particles. With the **ASCO Nanojet** a lot of smallest pellets hit on the surface to be cleaned which ensures a precise, fast and consistent surface cleaning. Together with the newly developed gun nozzle and the optional blasting gun with integrated cutter for even finer dry ice pellets, the **ASCO Nanojet** is the **perfect all-round package for almost all applications**. The integrated grounding roll ensures safe handling during the blasting process. Further benefits are the very low noise level and the significantly reduced compressed air consumption of the **ASCO Nanojet**.


Powerful and very handy blasting gun:

Thanks to a **quick connect coupling** the gun can be attached to the blasting unit very easily.

Increased security thanks to the **locking pin**, which makes a sudden opening of the locking mechanism of the nozzle impossible.

A **quick exchange system** allows nozzles to be changed within seconds without any tools.

The **ergonomic gun handle** ensures very easy handling and comfortable operation when blasting over longer periods. The newly developed safety mechanism is ideal for left and right-hander.

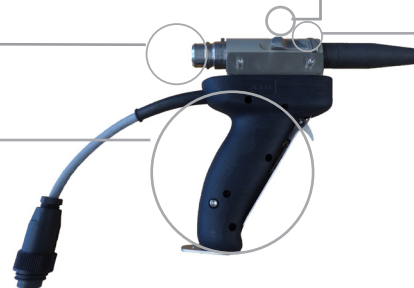


Specifications

Material:	frame and cover sheets made of powder-coated steel
Dimensions (L x W x H) incl. wheels and folded handle:	635 x 491 x 872mm (variable) (25 x 20 x 35 in)
Weight empty:	approx. 52 kg (114.6 lb)
Content of pellet hopper:	approx. 6 kg (13.22 lb)
Blasting pressure:	2 - 10 bar (29.01-145.04 psi) (adjustable)
Dry ice consumption:	5 - 20 kg/h (11-44 lb/h) (stepless)
Max. power consumption:	500W (0.68HP) nominal
Voltage:	230 V, 50/60 Hz, 1 Ph (other voltages on request)
Connection:	Input: claw coupling 3/4"


ASCO Nanojet tool case part no. 4064272




ASCO Nanojet: Special features



Powerful and handy blasting gun with quick connect coupling



Highly manoeuvrable



Quick connect coupling at blasting hose




Lightweight and compact




Integrated holding device for hose



Vertically adjustable handle for easy handling



Integrated grounding wire for more safety



Insulated pellet hopper with 6 kg (13.22 lb) capacity



Control panel for easy overview

ASCO Nanojet: Options

Pos. 001

Barrel nozzle 707.09/10/K

part no. 4047277

Thanks to an inner diameter of only 7 mm (0.27 in) in the barrel nozzle has a very economical air consumption but is nevertheless powerful.

OHS



Outlet opening: approx. Ø 10 mm (0.39 in)
Length: 9 cm (3.54 in)
Inner diameter: 7 mm (0.28 in)
Material: plastic

Pos. 002

Barrel nozzle 707.15/12/K

part no. 4047278

Thanks to an inner diameter of only 7 mm (0.27 in) the barrel nozzle has a very economical air consumption but is nevertheless powerful.

OHS



Outlet opening: approx. Ø 12 mm (0.47 in)
Length: 15 cm (5.91 in)
Inner diameter: 7 mm (0.28 in)
Material: plastic

Pos. 003

Protective sleeve for one hose system 165mm (6.5 in)

part no. 4047265

To protect the control cable and blasting hose from dirt and damages

OHS
OHP



Available in meters


ASCO Nanojet: Options

Pos. 004

Spare parts kit ASCO Nanojet

Containing the most important parts to ensure quick reaction for continuous operation

part no. 4063501



Pos. 005

Barrel nozzle 807.09/09 for OHC gun

Alternative nozzle for OHC gun made of aluminium

Outlet opening: approx. \varnothing 9 mm (0.35 in)
Length: 9 cm (3.54 in)
Inner diameter: 7 mm (0.28 in)
Material: Aluminium

OHC

part no. 4047120



Pos. 006

Angled nozzle 807.16/10/90°/K for OHC gun

Nozzle to clean in narrow spaces

Outlet opening: \varnothing 10 mm (0.39 in)
Length: 16 cm (6.31 in)
Inner diameter: 7 mm (0.28 in)
Material: plastic

OHC

part no. 4047110



Pos. 007

Flat nozzle 807.14/30/K for OHC gun

Thanks to an inner diameter of only 7 mm (0.28 in) the flat nozzle has a very economical air consumption but is nevertheless powerful. Suitable for blasting large areas.

Outlet opening: approx. 30 mm \times 1.6 mm (1.18 \times 0.06 in)
Length: 14 cm (5.51 in)
Inner diameter: 7 mm (0.28 in)
Material: plastic

OHC

part no. 4047119



ASCO Nanojet basic (part no. 900910):Options

Blasting gun OHSK

Standard for the ASCO Nanojet
Length: 20 cm (7.87 in)
Weight: 0.8 kg (1.76 lb)

including

Barrel nozzle 704.09/08/K for OHSK gun

Standard for ASCO Nanojet Blasting Gun
(exclusively for Nanojet)

Powerful nozzle with extremely low air consumption
Outlet opening: approx. \varnothing 8 mm (0.35 in)
Length: 9 cm (3.54 in)
Inner diameter: 4 mm (0.16 in)
Material: plastic

OHSK

part no. 4063748



part no. 4064141



Hose assembly 5 m (16.4ft) ID 13 mm (0.51 in) for OHSK/OHC gun

Standard for the ASCO Nanojet, can also be used as an extension of the hose assembly
incl. control cable, grounded

OHS
OHC

part no. 4047111



Compressed air hose 7.5 m (24.6ft) ID 10 mm (0.39 in)

The 7.5 m (24.6ft) compressed air hose with a claw coupling on the equipment side and a plug in nipple on the compressed air system side makes quick provision of air possible at the job site.

part no. 4047095



ASCO Nanojet tool case (part no. 4064272): Options

High performance barrel nozzle 705.09/08/K

part no. 4047089

Standard for the blasting gun OHSK

Powerful nozzle with very low air consumption
Outlet opening: approx. \varnothing 8 mm (0.31 in)
Length: 9 cm (3.54 in)
Inner diameter: 5 mm (0.2 in)
Material: plastic

OHS



Angled nozzle 704.16/08/90°K

part no. 4064464

A powerful nozzle for confined spaces with very low air consumption

Outlet opening: approx. \varnothing 8 mm (0.31 in)
Length: 16 cm (6.23 in)
Inner diameter: 4 mm (0.16 in)
Material: plastic

OHS



Dry ice blasting gun OHC with integrated cutter

part no. 4063744

Standard for the ASCO Nanojet
Length: 20 cm (7.87 in)
Weight: 0.8 kg (1.76 lb)

OHC



Special wrench for cutter grid

part no. 4047109

To easily change the grid of the OHC gun

OHC



Barrel nozzle 807.09/09/K for OHC gun

part no. 4047120

Standard equipment to OHC gun

Outlet opening: approx. \varnothing 9 mm (0.35 in)
Length: 9 cm (3.54 in)
Inner diameter: 7 mm (0.28 in)
Material: plastic

OHC



Tool case ASCO Nanojet

part no. 4064491

Empty tool case with matching insert

OHS
OHC



Lighting kit for dry ice blasting gun

Compact torch
LED light 160 lumen, 160 cm (63 in)
Up to 25 hours battery life

Length: 10.6 cm (4.2 in)
Weight: 120 g (0.35 lb)

OHS
OHP
HP

part no. 4064129

